## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 24 February 2005 (24.02.2005)

PCT

## (10) International Publication Number WO 2005/017419 A1

(51) International Patent Classification7:

F24F 13/068

(21) International Application Number:

PCT/SE2004/001182

(22) International Filing Date: 12 August 2004 (12.08.2004)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

0302201-9

13 August 2003 (13.08.2003) SE


- (71) Applicant (for all designated States except US): AIRSON AB [SE/SE]; Metallgatan 33, S-262 72 Ängelholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KRISTENSSON, Jan [SE/SE]; Syrenvägen 1, S-262 65 Ängelholm (SE). KRISTENSSON, Dan [SE/SE]; Björkstigen 15, S-262 63 Ängelholm (SE). SVENSSON, Pål [SE/SE]; Sniljegången 10, S-302 44 Halmstad (SE).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guid-

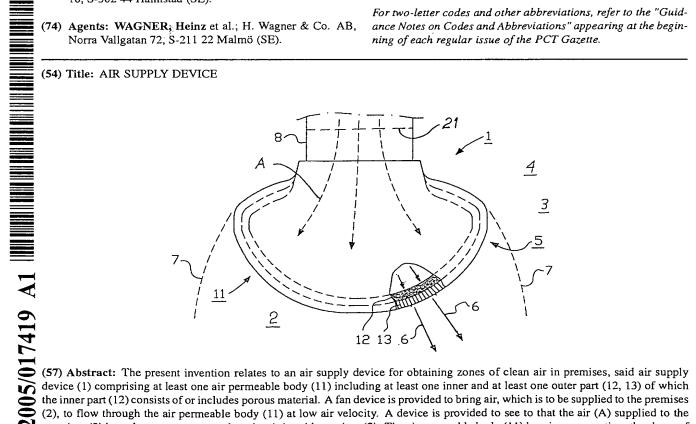

(2), to flow through the air permeable body (11) at low air velocity. A device is provided to see to that the air (A) supplied to the premises (2) has a lower temperature than the air in said premises (2). The air permeable body (11) has, in cross section, the shape of parts of a circle or substantially a circle or primarily parts of a circle or substantially a circle. The outer part (13) has passages which are substantially rectilinear, substantially uniform in thickness and located close to each other, said passages further having a length which is at least four times greater than their width in order to generate rectilinear and uniformly distributed partial air streams.

